

PRODUIT



CIXI CHENGHE PIPE INDUSTRY CO.,LTD

Add: No.158 Zongyi Road,Zonghan Town, cixi city,
Zhejiang province, china 315301

Tel: +86 574 63221526

Fax: +86 574 63220396

Email:moneyduo@ccpielectric.com

www.ccpielectric.com



STAINLESS STEEL PRODUCT

SS CONDUIT AND ACCESSORIES
SS RIGID AND LT FITTING
SS CONDUIT BODY AND FD BOX
SS HAZARDOUS LOCATION PRODUCT
SS SUPPORT PRODUCT



www.ccpielectric.com





SS CONDUIT AND ACCESSORIES



E483259

STAINLESS STEEL IMC CONDUIT

Standard: UL 1242
Material: 304SS or 316SS
Finish: Pickling and Passivating (ID), Polished#240 (OD)



CAT#		Trade Size		Nominal Outside		Nominal Wall Thickness		Approx. Wt. Per 100 Ft. (30.5M)		Qty. In Master Bundle	
304	316	US	Metric	in.	mm	in.	mm	lb.	kg	ft.	pcs
IMCSS15	IMCSS15/6	1/2	16	0.815	20.70	0.078	1.98	61	27.9	2500	250
IMCSS20	IMCSS20/6	3/4	21	1.029	26.13	0.083	2.10	84	37.9	2000	200
IMCSS25	IMCSS25/6	1	27	1.290	32.76	0.093	2.35	119	53.8	1250	125
IMCSS32	IMCSS32/6	1-1/4	35	1.638	41.60	0.095	2.42	157	71.3	900	90
IMCSS40	IMCSS40/6	1-1/2	41	1.883	47.82	0.100	2.54	190	86.5	800	80
IMCSS50	IMCSS50/6	2	53	2.360	59.94	0.105	2.67	253	114.9	500	50

Outside diameter tolerances:
+/- .050 in. (1.2 mm) for trade sizes 1/2" (16mm) through 1 1/2" (41mm), +/-2%.for trade size 2" (53mm) through 4" (103 mm)
Wall thickness tolerances: +/-12.5%
NOTE: Length = 10 ft. (3.05m) with a tolerance of +/- .25" (6.35mm)

RIGID STAINLESS STEEL CONDUIT(RSSC)

Standard: UL 6A
Material: 304SS or 316SS
Finish: Pickling and Passivating (ID), Polished#240 (OD)



CAT#		Trade Size		Nominal Outside		Nominal Wall Thickness		Approx. Wt. Per 100 Ft. (30.5M)		Qty. In Master Bundle	
304	316	US	Metric	in.	mm	in.	mm	lb.	kg	ft.	pcs
RSSC15	RSSC15/6	1/2	16	0.84	21.3	0.104	2.6	82	37.2	2500	250
RSSC20	RSSC20/6	3/4	21	1.05	26.7	0.107	2.7	109	49.4	2000	200
RSSC25	RSSC25/6	1	27	1.315	33.4	0.126	3.2	161	73	1250	125
RSSC32	RSSC32/6	1-1/4	35	1.66	42.2	0.133	3.4	218	98.9	900	90
RSSC40	RSSC40/6	1-1/2	41	1.9	48.3	0.138	3.5	263	119.3	800	80
RSSC50	RSSC50/6	2	53	2.375	60.3	0.146	3.7	350	158.7	600	60
RSSC65	RSSC65/6	2-1/2	63	2.875	73	0.193	4.9	559	253.5	370	37
RSSC80	RSSC80/6	3	78	3.5	88.9	0.205	5.2	727	329.7	300	30
RSSC90	RSSC90/6	3-1/2	91	4	101.6	0.215	5.5	880	399.1	250	25
RSSC100	RSSC100/6	4	103	4.5	114.3	0.225	5.7	1030	467.1	200	20
RSSC125	RSSC125/6	5	129	5.563	141.3	0.245	6.2	1400	634.9	150	15
RSSC150	RSSC150/6	6	155	6.625	168.3	0.266	6.8	1840	834.5	100	10

Outside diameter tolerances:
+/- .050 in. (1.2 mm) for trade sizes 1/2" (16mm) through 1 1/2" (41mm), +/-2%.for trade size 2" (53mm) through 6" (155mm)
Wall thickness tolerances: +/-12.5%
NOTE: Length = 10 ft. (3.05m) with a tolerance of +/- .25" (6.35mm)

Flex SS Conduit

Material: SS304 or SS316
Finish: Normal



CAT#		TRADE SIZE
304	316	
JS050SS	JS050SS/6	1/2"
JS075SS	JS075SS/6	3/4"
JS0100SS	JS0100SS/6	1"
JS0125SS	JS0125SS/6	1 1/4"
JS0150SS	JS0150SS/6	1 1/2"
JS0200SS	JS0200SS/6	2"

LT Flex SS Conduit

Material: SS304 or SS316
Finish: PVC Jacket




CAT#		TRADE SIZE
304	316	
JSB050SS	JSB050SS/6	1/2"
JSB075SS	JSB075SS/6	3/4"
JSB0100SS	JSB0100SS/6	1"
JSB0125SS	JSB0125SS/6	1 1/4"
JSB0150SS	JSB0150SS/6	1 1/2"
JSB0200SS	JSB0200SS/6	2"

RIGID 90° STANDARD
STAINLESS STEEL ELBOW

Standard: UL 6A
Material: 304SS or 316SS
Finish: Pickling and Passivating (ID), Polished#240 (OD)



CAT#		Trade Size	Metric Size	Min Radius R (in)	Offset C(in)	Straight End D(in)
304	316					
RSSCE9015	RSSCE9015/6	1/2"	16	4.00	7.10	3.10
RSSCE9020	RSSCE9020/6	3/4"	21	4.50	7.95	3.45
RSSCE9025	RSSCE9025/6	1"	27	5.75	9.70	3.95
RSSCE9032	RSSCE9032/6	1-1/4"	35	7.25	12.55	5.30
RSSCE9040	RSSCE9040/6	1-1/2"	41	8.25	13.25	5.00
RSSCE9050	RSSCE9050/6	2"	53	9.50	15.50	6.00
RSSCE9065	RSSCE9065/6	2-1/2"	63	10.50	16.25	6.50
RSSCE9080	RSSCE9080/6	3"	78	13.00	19.80	6.80
RSSCE9090	RSSCE9090/6	3-1/2"	91	15.00	22.20	7.20
RSSCE90100	RSSCE90100/6	4"	103	16.00	24.40	8.40
RSSCE90125	RSSCE90125/6	5"	129	24.00	35.90	11.90
RSSCE90150	RSSCE90150/6	6"	155	30.00	43.45	13.45




Available in standard sizes 90°, 60°, 45°, 30° ,22.5 ° bends

STAINLESS STEEL RIGID COUPLING

Standard: UL 6A
Material: 304SS or 316SS
Finish: Pickling and Passivating (ID), Polished#240 (OD)


CAT#		Size	Threads per inch	O.D.	Min Length
304	316				
SSC15	SSC15/6	1/2	14	1.08	1-5/8
SSC20	SSC20/6	3/4	14	1.33	1-41/64
SSC25	SSC25/6	1	11-1/2	1.56	1-31/32
SSC32	SSC32/6	1-1/4	11-1/2	1.95	2-1/32
SSC40	SSC40/6	1-1/2	11-1/2	2.22	2-1/16
SSC50	SSC50/6	2	11-1/2	2.75	2-1/8
SSC65	SSC65/6	2-1/2	8	3.28	3-3/16
SSC80	SSC80/6	3	8	3.94	3-5/16
SSC90	SSC90/6	3-1/2	8	4.44	3-13/32
SSC100	SSC100/6	4	8	5.00	3-33/64
SSC125	SSC125/6	5	8	6.30	3-61/64
SSC150	SSC150/6	6	8	7.39	4-1/4



Outside diameter tolerances:
+/- .050 in. (1.2mm) for trade sizes 1/2" (16mm) through 1 1/2" (41mm),
+/-2%.for trade size 2" (53mm) through 6" (155mm)

STAINLESS STEEL RIGID NIPPLE

Standard: UL 6A
Material: 304SS or 316SS
Finish: Pickling and Passivating (ID), Polished#240 (OD)



Type 304 SS		NIPPLE LENGTH											
SIZE	OD	CLOSE	2"	2-1/2"	3"	3-1/2"	4"	5"	6"	8"	10"	12"	
1/2	0.840	SSN15CL	SSN1520	SSN1525	SSN1530	SSN1535	SSN1540	SSN1550	SSN1560	SSN1580	SSN15100	SSN15120	
3/4	1.015	SSN20CL	SSN2020	SSN2025	SSN2030	SSN2035	SSN2040	SSN2050	SSN2060	SSN2080	SSN20100	SSN20120	
1	1.315	SSN25CL	SSN2520	SSN2525	SSN2530	SSN2535	SSN2540	SSN2550	SSN2560	SSN2580	SSN25100	SSN25120	
1-1/4	1.660	SSN32CL	SSN3220	SSN3225	SSN3230	SSN3235	SSN3240	SSN3250	SSN3260	SSN3280	SSN32100	SSN32120	
1-1/2	1.900	SSN40CL	SSN4020	SSN4025	SSN4030	SSN4035	SSN4040	SSN4050	SSN4060	SSN4080	SSN40100	SSN40120	
2	2.375	SSN50CL		SSN5025	SSN5030	SSN5035	SSN5040	SSN5050	SSN5060	SSN5080	SSN50100	SSN50120	
2-1/2	2.875	SSN65CL			SSN6530	SSN6535	SSN6540	SSN6550	SSN6560	SSN6580	SSN65100	SSN65120	
3	3.500	SSN80CL				SSN8035	SSN8040	SSN8050	SSN8060	SSN8080	SSN80100	SSN80120	
3-1/2	4.000	SSN90CL					SSN9040	SSN9050	SSN9060	SSN9080	SSN90100	SSN90120	
4	4.500	SSN100CL					SSN10040	SSN10050	SSN10060	SSN10080	SSN100100	SSN100120	
5	5.563	SSN125CL						SSN12550	SSN12560	SSN12580	SSN125100	SSN125120	
6	6.625	SSN150CL							SSN15060	SSN15080	SSN150100	SSN150120	

Type 316 SS		NIPPLE LENGTH											
SIZE	OD	CLOSE	2"	2-1/2"	3"	3-1/2"	4"	5"	6"	8"	10"	12"	
1/2	0.840	SSN15CL/6	SSN1520/6	SSN1525/6	SSN1530/6	SSN1535/6	SSN1540/6	SSN1550/6	SSN1560/6	SSN1580/6	SSN15100/6	SSN15120/6	
3/4	1.015	SSN20CL/6	SSN2020/6	SSN2025/6	SSN2030/6	SSN2035/6	SSN2040/6	SSN2050/6	SSN2060/6	SSN2080/6	SSN20100/6	SSN20120/6	
1	1.315	SSN25CL/6	SSN2520/6	SSN2525/6	SSN2530/6	SSN2535/6	SSN2540/6	SSN2550/6	SSN2560/6	SSN2580/6	SSN25100/6	SSN25120/6	
1-1/4	1.660	SSN32CL/6	SSN3220/6	SSN3225/6	SSN3230/6	SSN3235/6	SSN3240/6	SSN3250/6	SSN3260/6	SSN3280/6	SSN32100/6	SSN32120/6	
1-1/2	1.900	SSN40CL/6	SSN4020/6	SSN4025/6	SSN4030/6	SSN4035/6	SSN4040/6	SSN4050/6	SSN4060/6	SSN4080/6	SSN40100/6	SSN40120/6	
2	2.375	SSN50CL/6		SSN5025/6	SSN5030/6	SSN5035/6	SSN5040/6	SSN5050/6	SSN5060/6	SSN5080/6	SSN50100/6	SSN50120/6	
2-1/2	2.875	SSN65CL/6			SSN6530/6	SSN6535/6	SSN6540/6	SSN6550/6	SSN6560/6	SSN6580/6	SSN65100/6	SSN65120/6	
3	3.500	SSN80CL/6				SSN8035/6	SSN8040/6	SSN8050/6	SSN8060/6	SSN8080/6	SSN80100/6	SSN80120/6	
3-1/2	4.000	SSN90CL/6					SSN9040/6	SSN9050/6	SSN9060/6	SSN9080/6	SSN90100/6	SSN90120/6	
4	4.500	SSN100CL/6					SSN10040/6	SSN10050/6	SSN10060/6	SSN10080/6	SSN100100/6	SSN100120/6	
5	5.563	SSN125CL/6							SSN12560/6	SSN12580/6	SSN125100/6	SSN125120/6	
6	6.625	SSN150CL/6							SSN15060/6	SSN15080/6	SSN150100/6	SSN150120/6	

NOTE: Length tolerances +/- 1/16" (1.59mm)



SS RIGID AND LT FITTING




E509375



E529734


SS LT Conduit Connector

1. Applications:
- To secure, ground and seal Liquid-tight Flexible Metal conduit to boxes and enclosures.
 - Used in tough, industrial and standard applications
 - Made of 316SS for long, dependable service where superior corrosion resistance and/or strength is required
2. Features:
- The surface is polished to provide better corrosion resistance and easier cleaning
 - Tapered threaded male hub NPT
 - Compact, slim diameter with small turning radius
 - Furnished with an insulated throat with stainless steel locknut and sealing ring
 - Suitable for wet locations
 - Long ferrule prevents pullout and tight bend conduit “pop-out”
 - RoHS compliant
3. Certifications and Compliances:
- UL Listed liquid-tight flexible metal conduit fittings are suitable for use in the following hazardous locations under NEC,
Class I, Division 2;
Class II, Division 1 and 2; and
Class III, Division 1 and 2,
suitable for grounding in sizes 1/2" through 11/4" under NEC.
 - UL Standards: 514B
 - CUL Standard: C22.2 No.18F
 - Fed. Spec. W-F-408E
 - NEMA: FB-1
 - UL and CUL File No. E509375
4. Standard Materials:
- Body – Straight: 316SS
45°and 90°: 316SS(CF8M)
 - Gland nut – 316SS
 - Ferrule – 316SS
 - Gland nut sealing ring – PP
 - Sealing gasket –PE
 - Locknut – 316SS
 - Throat – PP
5. Standard Finishes:
- 316SS(CF8M) – electropolished
 - 316SS– vibration polished

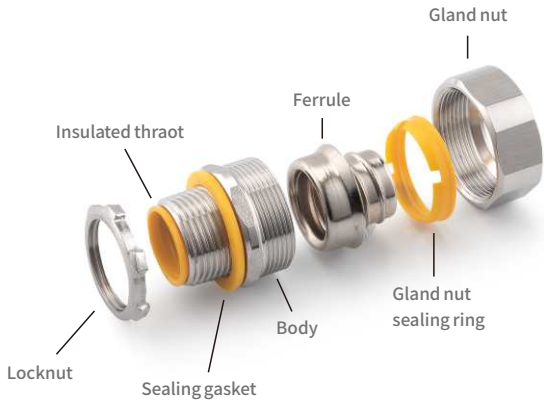

SS LT Straight Connector


Material:SS316
Finish:Vibration polished



CAT#	TRADE SIZE	A	B	C
LTC0015SS	1/2"	0.930	0.571	1.280
LTC0020SS	3/4"	1.024	0.630	1.560
LTC0025SS	1"	1.063	0.827	1.810
LTC0032SS	1 1/4"	1.160	0.830	2.280
LTC0040SS	1 1/2"	1.221	0.849	2.550
LTC0050SS	2"	1.332	0.911	3.090
LTC0065SS	2 1/2"	1.949	1.192	3.937
LTC0080SS	3"	2.087	1.192	4.705
LTC00100SS	4"	2.205	1.192	5.866

SS LT Ground Straight Connector


Material:SS316
Finish:Vibration polished



CAT#	TRADE SIZE	A	B	C
LTGC0015SS	1/2"	0.930	0.571	1.280
LTGC0020SS	3/4"	1.024	0.630	1.560
LTGC0025SS	1"	1.063	0.827	1.810
LTGC0032SS	1 1/4"	1.160	0.830	2.280
LTGC0040SS	1 1/2"	1.221	0.849	2.550
LTGC0050SS	2"	1.332	0.911	3.090
LTGC0065SS	2 1/2"	1.949	1.192	3.937
LTGC0080SS	3"	2.087	1.192	4.705
LTGC00100SS	4"	2.205	1.192	5.866

SS LT 45° Connector


Material:SS316
Finish:Vibration polished



CAT#	TRADE SIZE	A	B	C	D
LTC4515SS	1/2"	1.940	0.571	1.280	1.360
LTC4520SS	3/4"	2.160	0.630	1.560	1.524
LTC4525SS	1"	2.566	0.827	1.810	1.803
LTC4532SS	1 1/4"	2.932	0.830	2.280	2.085
LTC4540SS	1 1/2"	3.048	0.849	2.550	2.180
LTC4550SS	2"	3.760	0.911	3.090	2.645

SS LT Ground 45° Connector


Material:SS316
Finish:Vibration polished

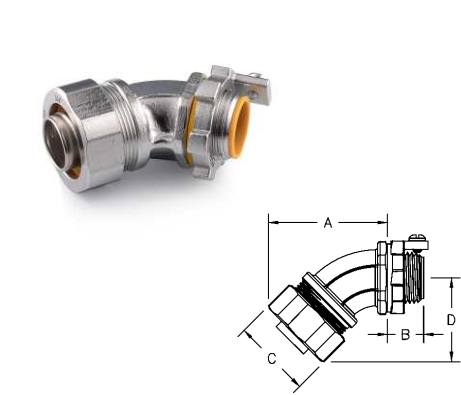

CAT#	TRADE SIZE	A	B	C	D
LTGC4515SS	1/2"	1.940	0.571	1.280	1.360
LTGC4520SS	3/4"	2.160	0.630	1.560	1.524
LTGC4525SS	1"	2.566	0.827	1.810	1.803
LTGC4532SS	1 1/4"	2.932	0.830	2.280	2.085
LTGC4540SS	1 1/2"	3.048	0.849	2.550	2.180
LTGC4550SS	2"	3.760	0.911	3.090	2.645

SS LT 90° Connector


Material:SS316
Finish:Vibration polished

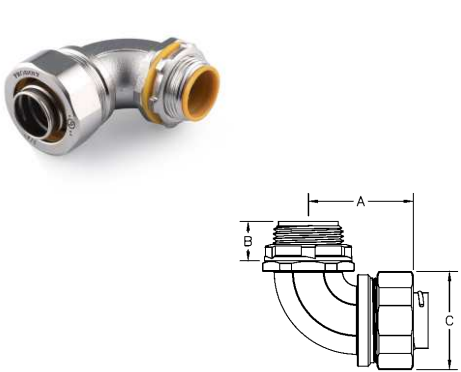

CAT#	TRADE SIZE	A	B	C
LTC9015SS	1/2"	1.712	0.571	1.280
LTC9020SS	3/4"	1.927	0.630	1.560
LTC9025SS	1"	2.047	0.827	1.810
LTC9032SS	1 1/4"	2.303	0.830	2.280
LTC9040SS	1 1/2"	2.480	0.849	2.550
LTC9050SS	2"	2.815	0.911	3.090

SS LT Ground 90° Connector


Material:SS316
Finish:Vibration polished

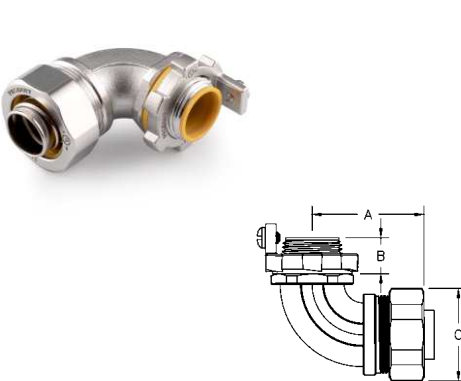

CAT#	TRADE SIZE	A	B	C
LTGC9015SS	1/2"	1.712	0.571	1.280
LTGC9020SS	3/4"	1.927	0.630	1.560
LTGC9025SS	1"	2.047	0.827	1.810
LTGC9032SS	1 1/4"	2.303	0.830	2.280
LTGC9040SS	1 1/2"	2.480	0.849	2.550
LTGC9050SS	2"	2.815	0.911	3.090

SS LT Combination Coupling


Material:SS316
Finish:Vibration polished

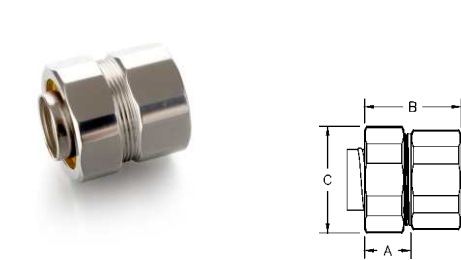

CAT#	TRADE SIZE	A	B	C
LTR0015SS	1/2"	0.805	1.550	1.360
LTR0020SS	3/4"	0.805	1.550	1.524
LTR0025SS	1"	0.866	1.811	1.803
LTR0032SS	1 1/4"	0.940	1.924	2.085
LTR0040SS	1 1/2"	1.020	2.044	2.180
LTR0050SS	2"	1.110	2.169	2.645

SS Watertight Hub


Material:SS316
Finish:electropolished

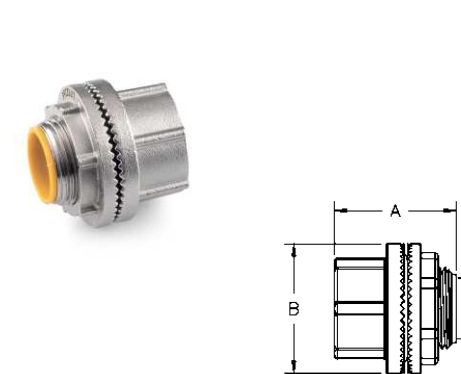

CAT#	TRADE SIZE	A	B	C
ST15SS	1/2"	1.575	1.457	0.591
ST20SS	3/4"	1.583	1.673	0.783
ST25SS	1"	1.791	1.988	0.996
ST32SS	1 1/4"	1.929	2.402	1.311
ST40SS	1 1/2"	2.008	1.717	1.530
ST50SS	2"	2.087	3.228	1.964
ST65SS	2 1/2"	2.697	3.740	2.346
ST80SS	3"	2.736	4.370	2.915
ST90SS	3 1/2"	2.814	4.721	3.371
ST100SS	4"	2.992	5.433	3.821

SS Watertight Ground Hub


Material:SS316
Finish:electropolished

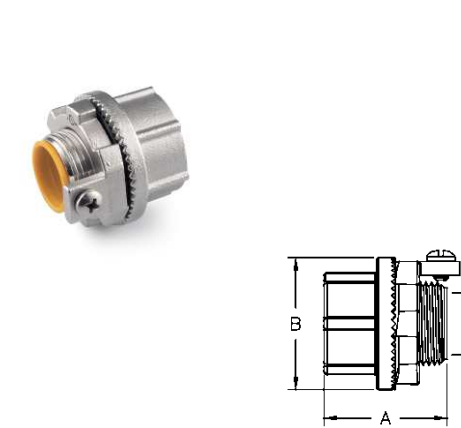

CAT#	TRADE SIZE	A	B	C
STG15SS	1/2"	1.575	1.457	0.591
STG20SS	3/4"	1.583	1.673	0.783
STG25SS	1"	1.791	1.988	0.996
STG32SS	1 1/4"	1.929	2.402	1.311
STG40SS	1 1/2"	2.008	1.717	1.530
STG50SS	2"	2.087	3.228	1.964
STG65SS	2 1/2"	2.697	3.740	2.346
STG80SS	3"	2.736	4.370	2.915
STG90SS	3 1/2"	2.814	4.721	3.371
STG100SS	4"	2.992	5.433	3.821

SS Three Piece Coupling


Material:SS316
Finish:Vibration polished

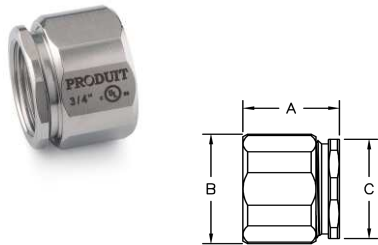

CAT#	TRADE SIZE	A	B	C
3PC15SS	1/2"	1.102	1.260	1.181
3PC20SS	3/4"	1.122	1.499	1.260
3PC25SS	1"	1.370	1.728	1.571
3PC32SS	1 1/4"	1.909	2.283	2.118
3PC40SS	1 1/2"	1.929	2.126	2.244
3PC50SS	2"	1.480	3.110	2.913

SS Conduit Bushing


Material:SS316
Finish:electropolished

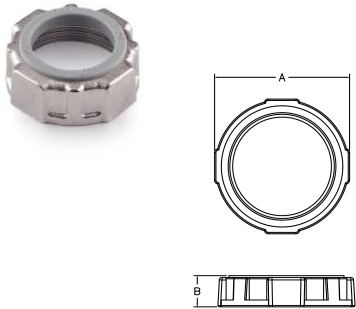

CAT#	TRADE SIZE	A	B
RBU15SS	1/2"	1.071	0.448
RBU20SS	3/4"	1.282	0.507
RBU25SS	1"	1.567	0.625
RBU32SS	1 1/4"	2.022	0.679
RBU40SS	1 1/2"	2.303	0.742
RBU50SS	2"	2.887	0.773
RBU65SS	2 1/2"	3.374	0.910
RBU80SS	3"	3.971	1.011
RBU90SS	3 1/2"	4.378	1.033
RBU100SS	4"	5.018	1.072

SS Conduit Ground Bushing


Material:SS316
Finish:electropolished

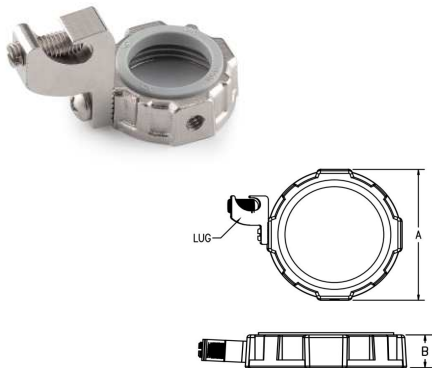

CAT#	TRADE SIZE	A	B	C
RGB15SS	1/2"	1.071	0.448	4-14AL
RGB20SS	3/4"	1.282	0.507	4-14AL
RGB25SS	1"	1.567	0.625	4-14AL
RGB32SS	1 1/4"	2.022	0.679	4-14AL
RGB40SS	1 1/2"	2.303	0.742	4-14AL
RGB50SS	2"	2.887	0.773	4-14AL
RGB65SS	2 1/2"	3.374	0.910	1/0-8AL
RGB80SS	3"	3.971	1.011	1/0-8AL
RGB90SS	3 1/2"	4.378	1.033	1/0-8AL
RGB100SS	4"	5.018	1.072	1/0-8AL

SS Locknut

Material:SS316
Finish:Vibration polished

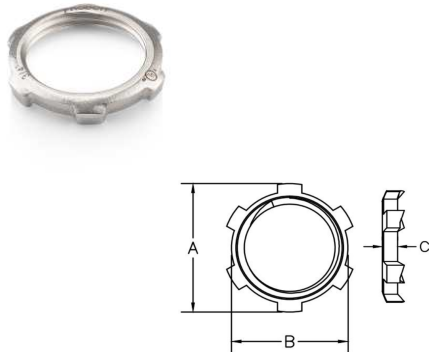

CAT#	TRADE SIZE	A	B	C
RLN15SS	1/2"	1.142	1.011	0.134
RLN20SS	3/4"	1.389	1.258	0.134
RLN25SS	1"	1.724	1.269	0.134
RLN32SS	1 1/4"	2.082	1.921	0.177
RLN40SS	1 1/2"	2.392	2.203	0.177
RLN50SS	2"	2.901	2.711	0.177
RLN65SS	2 1/2"	3.740	3.465	0.425
RLN80SS	3"	4.370	4.094	0.425
RLN90SS	3 1/2"	4.867	4.591	0.425
RLN100SS	4"	5.433	5.118	0.425

SS Reducing


Material:SS316
Finish:Vibration polished



CAT#	TRADE SIZE	A	B	C
RB1SS	3/4"x1/2"	0.559	0.610	0.870
RB2SS	1"x1/2"	0.630	0.610	1.110
RB3SS	1"x3/4"	0.630	0.810	1.110
RB4SS	1 1/4"x1/2"	0.701	0.610	1.429
RB5SS	1 1/4"x3/4"	0.701	0.810	1.429
RB6SS	1 1/4"x1"	0.701	1.035	1.429
RB7SS	1 1/2"x1/2"	0.701	0.610	1.681
RB8SS	1 1/2"x3/4"	0.701	0.810	1.681
RB9SS	1 1/2"x1"	0.701	1.035	1.681
RB10SS	1 1/2"x1 1/4"	0.701	1.355	1.681
RB110SS	2"x1/2"	0.858	0.610	2.098
RB111SS	2"x3/4"	0.858	0.810	2.098
RB11SS	2"x1"	0.858	1.035	2.098
RB12SS	2"x1 1/4"	0.858	1.355	2.098
RB13SS	2"x1 1/2"	0.858	1.600	2.098
RB14SS	2 1/2"x1"	1.016	1.035	2.504
RB15SS	2 1/2"x1 1/4"	1.016	1.355	2.504
RB16SS	2 1/2"x1 1/2"	1.016	1.600	2.504
RB17SS	2 1/2"x2"	1.016	2.050	2.504
RB18SS	3"x1"	1.173	1.035	3.130
RB19SS	3"x1 1/4"	1.173	1.355	3.130
RB20SS	3"x1 1/2"	1.173	1.600	3.130
RB21SS	3"x2"	1.173	2.050	3.130
RB22SS	3"x2 1/2"	1.173	2.450	3.130
RB23SS	3 1/2"x2"	1.331	2.050	3.630
RB24SS	3 1/2"x2 1/2"	1.331	2.450	3.630
RB25SS	3 1/2"x3"	1.331	3.000	3.630
RB26SS	4"x2"	1.488	2.050	4.130
RB27SS	4"x2 1/2"	1.488	2.450	4.130
RB28SS	4"x3"	1.488	3.000	4.130
RB29SS	4"x3 1/2"	1.488	3.500	4.130

SS Chase Nipple


Material:SS316
Finish:Vibration polished



CAT#	TRADE SIZE	A	B	C
RBN15SS	1/2"	1.063	0.563	0.591
RBN20SS	3/4"	1.339	0.657	0.783
RBN25SS	1"	1.646	0.965	0.997
RBN32SS	1 1/4"	2.126	1.031	1.311
RBN40SS	1 1/2"	2.394	1.150	1.530
RBN50SS	2"	2.921	1.189	1.964
RBN65SS	2 1/2"	3.602	1.437	2.346
RBN80SS	3"	4.413	1.555	2.915
RBN90SS	3 1/2"	4.846	1.654	3.371
RBN100SS	4"	5.531	1.752	3.824

SS Rigid Compression Connector


Material:SS316
Finish:Vibration polished



CAT#	TRADE SIZE	A	B	C
RCC15SS	1/2"	0.810	0.571	1.172
RCC20SS	3/4"	0.887	0.601	1.461
RCC25SS	1"	0.992	0.638	1.724
RCC32SS	1 1/4"	1.195	0.740	2.171
RCC40SS	1 1/2"	1.251	0.771	2.388
RCC50SS	2"	1.256	0.835	2.914

SS Rigid Compression Coupling

Material:SS316
Finish:Vibration polished



CAT#	TRADE SIZE	A	B	C
RCK15SS	1/2"	0.776	1.813	1.172
RCK20SS	3/4"	0.887	1.875	1.461
RCK25SS	1"	0.992	2.188	1.724
RCK32SS	1 1/4"	1.195	2.652	2.171
RCK40SS	1 1/2"	1.251	2.688	2.388
RCK50SS	2"	1.295	3.063	2.914



SS CONDUIT BODY AND FD BOX



E501987

SS CONDUIT BODY AND FD BOX

1. Applications:

- Conduit outlet bodies are installed in conduit systems to:
 - Act as pull outlets for conductors being installed
 - Provide openings for making splices and taps in conductors
 - Connect conduit sections
 - Provide taps for branch conduit runs
 - Make 90° bends in conduit runs
 - Provide for access to conductors for maintenance and future system changes

2. Features:

- The surface is mirror polished to provide better corrosion resistance and easier cleaning
 - Form 8 bodies provide more room for heavier conductors
 - Conduit hubs have tapered threads(NPT), rigid joints and excellent ground continuity for protection of wire insulation
 - Two cover screws provided on all sizes to provide tight cover and gasket assembly. The covers have dome shapes for added strength and extra wiring room.
 - Outlet bodies designed to match conduit Size for neat, compact installations

3. Certifications and Compliances:

- UL Standard: 514A
 - CSA Standard 22.2 No. 18
 - Raintight – when installed with cover and gasket
 - IP69

4. Standard Materials:

- Body and box – 316SS(CF8M)
 - Cover – 316SS
 - Cover screw – 316SS
 - Gasket – neoprene


5. Standard Finishes:

- Body and box – mirror polished
 - Cover– mirror polished



SS Conduit Body C Type


Material:SS316
Finish:Mirror polished



CAT#	TRADE SIZE	A	B	C
C18SS	1/2"	5.953	1.446	1.455
C28SS	3/4"	6.686	1.647	1.706
C38SS	1"	7.566	1.845	1.979
C48SS	1 1/4"	8.815	2.237	2.307
C58SS	1 1/2"	10.186	2.808	2.795
C68SS	2"	12.355	3.858	3.505

SS Conduit Body LB Type


Material:SS316
Finish:Mirror polished



CAT#	TRADE SIZE	A	B	C
LB18SS	1/2"	5.082	1.446	2.277
LB28SS	3/4"	5.796	1.647	2.536
LB38SS	1"	6.598	1.845	2.987
LB48SS	1 1/4"	7.712	2.275	3.298
LB58SS	1 1/2"	9.055	2.854	3.677
LB68SS	2"	11.005	3.836	4.655
LB78SS	2 1/2"	13.826	5.024	5.890
LB88SS	3"	14.208	5.124	6.197
LB108SS	4"	16.851	6.229	7.290

SS Conduit Body LL Type

Material:SS316
Finish:Mirror polished




CAT#	TRADE SIZE	A	B	C
LL18SS	1/2"	5.082	2.200	1.446
LL28SS	3/4"	5.796	2.435	1.706
LL38SS	1"	6.598	2.769	1.979
LL48SS	1 1/4"	7.746	3.241	2.237
LL58SS	1 1/2"	9.055	3.805	2.808
LL68SS	2"	11.017	4.895	3.556

SS Conduit Body LR Type

Material:SS316

Finish:Mirror polished




CAT#	TRADE SIZE	A	B	C
LR18SS	1/2"	5.082	2.200	1.446
LR28SS	3/4"	5.796	2.435	1.706
LR38SS	1"	6.598	2.769	1.979
LR48SS	1 1/4"	7.746	3.241	2.237
LR58SS	1 1/2"	9.055	3.805	2.808
LR68SS	2"	11.017	4.895	3.556

SS Conduit Body T Type

Material:SS316

Finish:Mirror polished




CAT#	TRADE SIZE	A	B	C
T18SS	1/2"	5.953	2.239	1.775
T28SS	3/4"	6.686	2.457	1.706
T38SS	1"	7.566	2.776	1.979
T48SS	1 1/4"	8.815	3.188	2.307
T58SS	1 1/2"	10.186	3.795	2.795
T68SS	2"	12.355	4.927	3.556
T78SS	2 1/2"	16.116	6.689	3.921
T88SS	3"	16.094	6.749	4.553
T108SS	4"	18.537	8.031	5.447

SS Conduit Body TB Type

Material:SS316

Finish:Mirror polished




CAT#	TRADE SIZE	A	B	C
TB18SS	1/2"	5.953	1.446	2.277
TB28SS	3/4"	6.686	1.647	2.815
TB38SS	1"	7.566	1.845	3.185
TB48SS	1 1/4"	8.895	2.237	3.252
TB58SS	1 1/2"	10.258	2.808	3.804
TB68SS	2"	12.290	3.752	4.655

SS Conduit Body X Type

Material:SS316

Finish:Mirror polished




CAT#	TRADE SIZE	A	B	C
X18SS	1/2"	5.953	3.815	1.455
X28SS	3/4"	6.642	3.293	1.706
X38SS	1"	7.566	3.693	1.979
X48SS	1 1/4"	8.815	4.118	2.307
X58SS	1 1/2"	10.186	4.787	2.795
X68SS	2"	12.296	6.039	3.556

SS Device Box And Cover

Material:SS316

Finish:Mirror polished



CAT#	TRADE SIZE	A	B	C
FD2SS	3/4"	6.083	3.042	2.898
FDC2SS	3/4"	6.113	3.042	2.898
FDS2SS	3/4"	5.322	3.042	2.898
FDA2SS	3/4"	4.496	3.042	3.665
FDX2SS	3/4"	6.085	4.659	2.898
FDCT2SS	3/4"	6.085	3.896	2.898






SS HAZARDOUS LOCATION PRODUCT



SS UNY


Material:SS316
Finish:polished#240
NEC/CEC:
Class I, Divisions 1 & 2, Groups A, B, C, D
Class II, Division 1, Groups E, F, G
Class II, Division 2, Groups F, G
Class III



CAT#	TRADE SIZE	A	B	C
UNY15SS	1/2"	1.417	1.791	2.480
UNY20SS	3/4"	1.724	2.047	2.630
UNY25SS	1"	2.079	2.165	2.846
UNY32SS	1 1/4"	2.441	2.185	3.031
UNY40SS	1 1/2"	2.677	2.228	3.122
UNY50SS	2"	3.150	2.276	3.220

SS UNF


Material:SS316
Finish:polished#240
NEC/CEC:
Class I, Divisions 1 & 2, Groups A, B, C, D
Class II, Division 1, Groups E, F, G
Class II, Division 2, Groups F, G
Class III



CAT#	TRADE SIZE	A	B	C
UNF15SS	1/2"	1.417	1.181	1.850
UNF20SS	3/4"	1.724	1.371	1.944
UNF25SS	1"	2.079	1.406	2.081
UNF32SS	1 1/4"	2.441	1.605	2.456
UNF40SS	1 1/2"	2.677	1.660	2.554
UNF50SS	2"	3.150	1.688	2.633

SS REA


Material:SS316
Finish:Vibration polished
NEC/CEC:
Class I, Divisions 1 & 2, Groups A, B, C, D
Class II, Division 1, Groups E, F, G
Class II, Division 2, Groups F, G
Class III



CAT#	TRADE SIZE	A	B	C
REA12SS	M1/2"×F3/4"	1.614	1.162	0.965
REA23SS	M3/4"×F1"	1.772	1.429	1.102
REA34SS	M1"×F1 1/4"	2.047	1.810	1.181

SS PLG(Recessed)

Material:SS316
Finish:Vibration polished
NEC/CEC:
Class I, Divisions 1 & 2, Groups A, B, C, D
Class II, Division 1, Groups E, F, G
Class II, Division 2, Groups F, G
Class III



CAT#	TRADE SIZE	A	B	
PLG1SS	1/2"	0.669	0.839	
PLG2SS	3/4"	0.669	1.050	
PLG3SS	1"	0.826	1.315	
PLG4SS	1 1/4"	0.826	1.660	
PLG5SS	1 1/2"	0.826	1.900	
PLG6SS	2"	0.826	2.375	

SS GUA SERIES OUTLET BOX

Material:SS316
Finish:Mirror polished
NEC/CEC:
Class I, Divisions 1 & 2, Groups C, D
Class II, Division 1, Groups E, F, G
Class II, Division 2, Groups F, G
Class III



GUAB



Cat. No.	TRADE SIZE	COVER OPENING
GUAB26SS	3/4"	3"
GUAB36SS	1"	3"



GUAN

Cat. No.	TRADE SIZE	COVER OPENING
GUAN26SS	3/4"	3"
GUAN36SS	1"	3"

GUAC



Cat. No.	TRADE SIZE	COVER OPENING
GUAC26SS	3/4"	3"
GUAC36SS	1"	3"



GUAT

Cat. No.	TRADE SIZE	COVER OPENING
GUAT26SS	3/4"	3"
GUAT36SS	1"	3"
GUAT59SS	1 1/2"	5"
GUAT69SS	2"	5"

GUAL



Cat. No.	TRADE SIZE	COVER OPENING
GUAL26SS	3/4"	3"
GUAL36SS	1"	3"




GUAX

Cat. No.	TRADE SIZE	COVER OPENING
GUAX26SS	3/4"	3"
GUAX36SS	1"	3"

SS EYS

Material:SS316
Finish:Mirror polished
NEC/CEC:

Class I, Divisions 1 & 2, Groups A, B, C, D Class II, Division 1, Groups E, F, G Class II, Division 2, Groups F, G Class III	1/2"-1"
Class I, Divisions 1 & 2, Groups C, D Class II, Division 1, Groups E, F, G Class II, Division 2, Groups F, G Class III	1-1/4"-2"



CAT#	TRADE SIZE	A	B	TURNING RADIUS
EYS21SS	3/4"	3.658	1.504	1.244
EYS31SS	1"	4.266	1.768	1.457
EYS5SS	1 1/2"	5.591	2.441	2.080
EYS6SS	2"	6.260	2.992	2.381




SS SUPPORT PRODUCT



E516500

SS STRUT CHANNEL


Material:SS304 or SS316

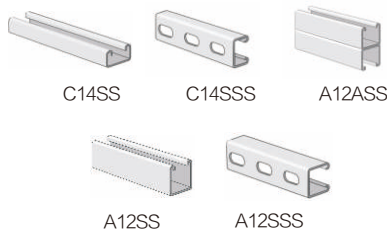

CAT#		STYLE	SIZE	STEEL GAUGE
304	316			
A12ASS	A12ASS/6	SHALLOW	1-5/8"x3-1/4"	12
A12SS	A12SS/6	SHALLOW	1-5/8"x1-5/8"	12
A12SSS	A12SSS/6	SLOTTED	1-5/8"x1-5/8"	12
C14SS	C14SS/6	SHALLOW	1-5/8"x13/16"	12
C14SSS	C14SSS/6	SLOTTED	1-5/8"x13/16"	12

SS RIGID ONE HOLE STRAP


Material:SS316
Finish:Mechanical polishing

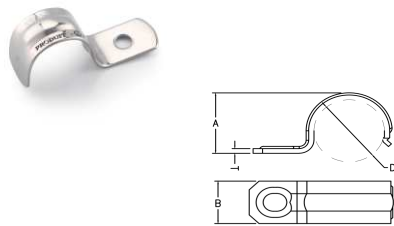

CAT#	TRADE SIZE	A	B	D	T
RSS15SS	1/2"	0.835	0.625	0.840	0.071
RSS20SS	3/4"	0.992	0.744	1.050	0.079
RSS25SS	1"	1.465	0.866	1.314	0.079
RSS32SS	1 1/4"	1.660	0.866	1.660	0.079
RSS40SS	1 1/2"	1.886	1.000	1.900	0.098
RSS50SS	2"	2.303	1.126	2.376	0.110
RSS65SS	2 1/2"	2.780	1.236	2.876	0.150
RSS80SS	3"	3.426	1.236	3.500	0.150
RSS90SS	3 1/2"	4.063	1.236	4.000	0.177
RSS100SS	4"	4.571	1.236	4.500	0.177

SS CONDUIT CLAMP


Material:SS316
Finish:Mechanical polishing

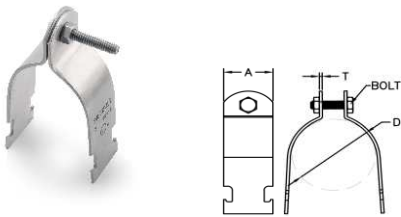

CAT#	TRADE SIZE	A	B	D	BOLT
CL15SS	1/2"	1.260	0.059	0.840	1/4"-20*1"
CL20SS	3/4"	1.260	0.079	1.050	1/4"-20*1"
CL25SS	1"	1.260	0.100	1.315	1/4"-20*1"
CL32SS	1 1/4"	1.260	0.100	1.660	1/4"-20*1"
CL40SS	1 1/2"	1.260	0.100	1.900	5/16"-18*1-1/4"
CL50SS	2"	1.260	0.100	2.375	5/16"-18*1-1/4"
CL65SS	2 1/2"	1.260	0.100	2.875	5/16"-18*1-1/4"
CL80SS	3"	1.260	0.100	3.500	5/16"-18*1-1/4"
CL90SS	3 1/2"	1.260	0.100	4.000	3/8"-16*1-1/2"
CL100SS	4"	1.260	0.100	4.500	3/8"-16*1-1/2"

SS RIGID TWO HOLES STRAP


Material:SS316
Finish:Mechanical polishing

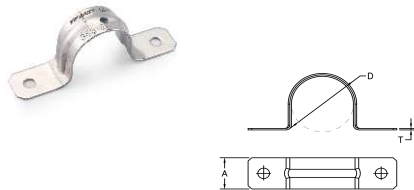

CAT#	TRADE SIZE	A	T	D
RSD15SS	1/2"	0.610	0.031	0.840
RSD20SS	3/4"	0.689	0.031	1.050
RSD25SS	1"	0.866	0.039	1.314
RSD32SS	1 1/4"	0.866	0.050	1.660
RSD40SS	1 1/2"	0.866	0.050	1.900
RSD50SS	2"	0.984	0.050	2.376
RSD65SS	2 1/2"	0.984	0.079	2.876
RSD80SS	3"	0.984	0.079	3.500
RSD90SS	3 1/2"	0.984	0.079	1.000
RSD100SS	4"	0.984	0.079	4.500

SS CONDUIT HANGER


Material:SS316
Finish:Mechanical polishing

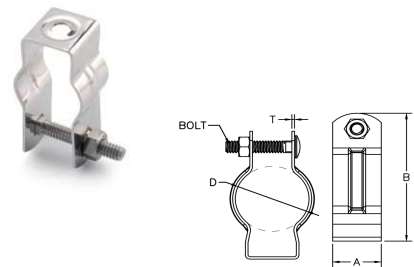

CAT#	TRADE SIZE	A	B	D	BOLT
CLH15SS	1/2"	0.075	1.930	0.840	1/4"-20*1-1/4"
CLH20SS	3/4"	0.870	2.360	1.050	1/4"-20*1-1/4"
CLH25SS	1"	0.870	2.620	1.315	1/4"-20*1-1/4"
CLH32SS	1 1/4"	0.870	3.270	1.660	1/4"-20*1-1/4"
CLH40SS	1 1/2"	1.260	3.440	1.900	1/4"-20*1-1/4"
CLH50SS	2"	1.260	4.730	2.375	1/4"-20*1-1/2"
CLH65SS	2 1/2"	1.180	5.430	2.875	1/4"-20*1-1/2"
CLH80SS	3"	1.180	5.430	3.500	1/4"-20*1-1/2"
CLH90SS	3 1/2"	1.260	5.830	4.000	1/4"-20*1-1/2"
CLH100SS	4"	1.260	6.230	4.500	1/4"-20*1-1/2"

SS U-BOLT


Material:SS316
Finish:Mechanical polishing

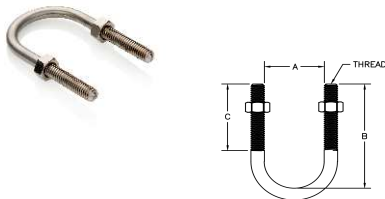

CAT#	TRADE SIZE	A	B	C	THREAD
CLU15SS	1/2"	0.943	2.410	1.500	5/16"-18
CLU20SS	3/4"	1.134	2.691	1.750	5/16"-18
CLU25SS	1"	1.390	3.153	1.750	5/16"-18
CLU32SS	1 1/4"	1.762	3.257	1.750	5/16"-18
CLU40SS	1 1/2"	2.011	3.502	1.750	5/16"-18
CLU50SS	2"	2.453	4.308	1.750	3/8"-16
CLU65SS	2 1/2"	2.987	4.804	1.750	3/8"-16
CLU80SS	3"	3.610	5.358	1.750	3/8"-16
CLU90SS	3 1/2"	4.114	5.802	1.750	3/8"-16
CLU100SS	4"	4.650	6.635	1.750	3/8"-16

SS U-BOLT

Material:SS316
Finish:Electrolytic polishing



CAT#	SIZE	A	B	C
BC500SS	1/4"-20	1.290	0.970	1.390
BC502SS	3/8"-16	1.930	1.200	1.800
BC503SS	1/2"-13	2.160	1.200	2.080

SS PARALLEL CLAMP

Material:SS316
Finish:Electrolytic polishing




CAT#	TRADE SIZE	A	B	R
PAR20SS	3/4"	1.103	2.887	0.525
PAR25SS	1"	1.103	3.086	0.657

SS RIGHT ANGLE CLAMP

Material:SS316

Finish:Electrolytic polishing

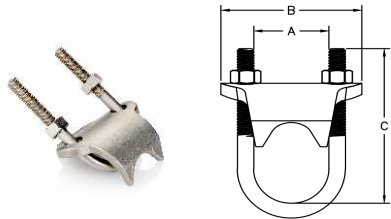

CAT#	TRADE SIZE	A	B	C	THREAD
RAN15SS	1/2"	0.943	2.081	2.410	5/16"-18
RAN20SS	3/4"	1.134	2.267	2.691	5/16"-18
RAN25SS	1"	1.390	2.603	3.153	5/16"-18
RAN32SS	1 1/4"	1.762	2.935	3.257	5/16"-18
RAN40SS	1 1/2"	2.011	3.190	3.502	5/16"-18
RAN50SS	2"	2.453	3.744	4.308	3/8"-16
RAN65SS	2 1/2"	2.987	4.309	4.804	3/8"-16
RAN80SS	3"	3.610	4.941	5.358	3/8"-16
RAN90SS	3 1/2"	4.114	5.466	5.802	3/8"-16
RAN100SS	4"	4.650	5.954	6.635	3/8"-16

FRC SS Rod Coupling

Material:SS316



CAT#	SIZE
FRC25SS	1/4"
FRC38SS	3/8"
FRC50SS	1/2"

FTR SS Continuous Thread Rod

Material:SS316



CAT#	SIZE
FTR25SS	1/4"x10'
FTR38SS	3/8"x10'
FTR50SS	1/2"x10'

FNS SS Nut With Spring

Material:SS316



CAT#	SIZE
FNS25SS	1/4"
FNS38SS	3/8"
FNS50SS	1/2"

902-1SS SS Standard Post Base

Material:SS316



902-2SS SS 45° Offset Post Base

Material:SS316



PS855SS SS Right angela beam clamp

Material:SS316



B116SS SS Three Hole U-Support

Material:SS316



B143SS SS 4-Hole Flat Angle

Material:SS316



B341SS SS 4-Hole Splice Plate

Material:SS316



B132SS SS Crass plate

Material:SS316



B140SS SS 3-Hole Flat Angle

Material:SS316



B101SS SS 2-Hole 90° Angle

Material:SS316



B133SS SS Tee Plate

Material:SS316



B115SS SS 4-Hole 90° Angle

Material:SS316



PS619SS SS Square Washers

Material:SS316



CAT#	SIZE
PS61925SS	1/4"
PS61938SS	3/8"
PS61950SS	1/2"